




N2-MT: Extruded film having one side Matte and other side Glossy non heat sealable corona treated on both side




The big salient feature of SGF BOPP N2-MT film

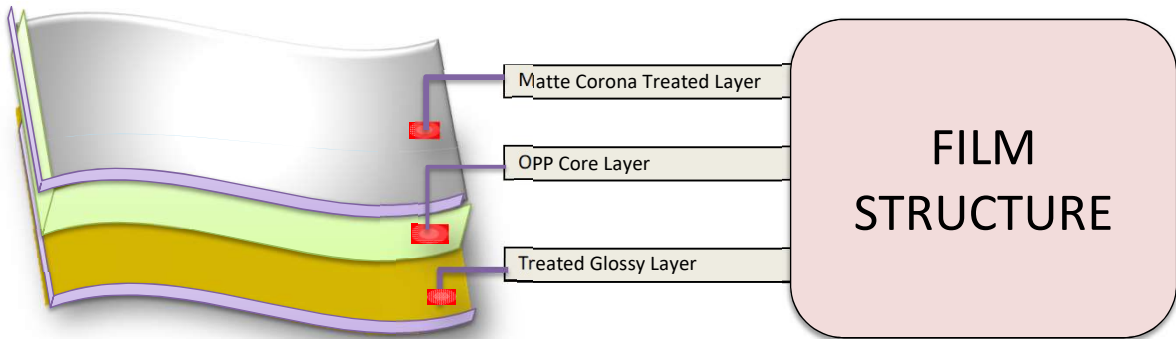


Fine Printability
Excellent Clarity



Strong Bond
improved ink adhesion & stronger lamination bond



Excellent matte appearance
& other side highly gloss



Good antistatic & Slip
Good surface treatment retention



Good mechanical properties

- KEY FEATURES:**
- *Excellent Matte appearance.
 - *Very good dispersion.
 - *Excellent anchorage of inks and adhesives on treated side .
 - *Good antistatic and slip properties.
 - *Good surface treatment retention.
 - *Good mechanical properties.

- APPLICATIONS:**
- * Paper and board lamination
 - * Printed posters/ calendars/ book covers lamination
 - * Reverse printing and lamination
 - * Conversion



PROPERTIES		TEST METHOD (ASTM)	UNIT	TECHNICAL DATA						
THICKNESS	Internal	Micron	10	12	13	15	18	20	25	30
		(Gauge)	40	48	52	60	72	80	100	120
FILM DENSITY	D-1505	gm/cc	0.865	0.865	0.865	0.865	0.865	0.865	0.865	0.865
GRAMMAGE	Internal	gm/m ²	8.7	10.4	11.2	13.0	15.6	17.3	21.6	26.0
YIELD	Internal	m ² /kg	115.6	96.3	88.9	77.1	64.2	57.8	46.2	38.5
TREATMENT LEVEL	D-2578	dy/cm	38/40							
HAZE	D-1003	%	> 75							
GLOSS (AT 45°)	D-2457	%	< 10							
COEFF OF FRICTION	Dynamic	Internal	-	0.30 - 0.40						
TENSILE STRENGTH AT BREAK	MD*	D-882	kgf/cm ²	1050						
	TD*			2100						
MODULUS OF ELASTICITY	MD*	D-882	kgf/cm ²	15000						
	TD*			26000						
ELONGATION AT BREAK	MD*	D-882	%	130 - 190						
	TD*			40 - 80						
LINEAR SHRINKAGE (at 120°C/5 mins)	MD*	D-1204	%	< 5.0						
	TD*			< 3.0						

Note: MD – Machine Direction, TD – Transverse Direction

STORAGE & HANDLING

SGFBOPPTM does not require special storage conditions. It is recommended to storage below 30°C in order to avoid any deterioration of the film surface properties. It is advisable to use the material on FIFO basis. The film should be kept at anperating environment for 24 hours before processing.SGFBOPPTM is best suitable for use within 6 months from date of dispatch.

DISCLAIMER

It is the responsibility of our customers to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects.SGF provides no warranty and accepts no liability for any loss or fitness of the product for any

***TDS issued on 01-06-2023. All previous version of this grade are invalid.**

SGFBOPP FILMS Manufacturing Facilities in India SURYA GLOBAL FLEXIFILIMS Pvt.Ltd, A-119/1,Sector-29 Yamuna Expressway Industrial Development authority Gautam Buddha Nagar, Uttar pradsh-203201,