


**H1-LSLC** : Transparent Both Side Heat Sealable One Side Corona Treated, Other Side Low Heat Sealable ( 90 °C ) & Low COF.



The big salient feature of SGF BOPP H1-LSLC film

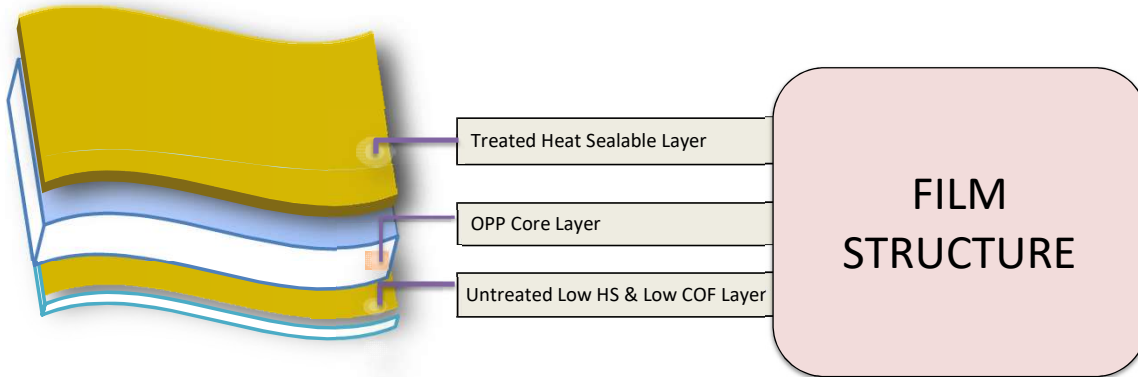

Good Sealing properties  
& high sealing strength



Good printability and  
suitable for lamination  
with other substrates



High surface gloss and  
transparency



Good mechanical  
properties

**KEY FEATURES:**

- \* Low seal initiation temperature.
- \* Excellent sealing properties & hot tack
- \* Low COF on Untreated surface.
- \* High speed FFS machine packaging application
- \* Good surface treatment retention.
- \* Good optical properties.
- \* Good mechanical Properties.

**APPLICATIONS:**

- \* Single / two ply printing lamination.
- \* High speed FFS machine packaging.
- \* Confectionery, Bakery & chips packing.
- \* General wrapping & hot tack.
- \* Flexible packaging.

PROPERTIES		TEST METHOD (ASTM)	UNIT	TECHNICAL DATA					
THICKNESS		Internal	Micron	<b>18</b>	<b>20</b>	<b>25</b>	<b>30</b>	<b>35</b>	<b>40</b>
			(Gauge)	72	80	100	120	140	160
FILM DENSITY		D-1505	gm/cc	0.91	0.91	0.91	0.91	0.91	0.91
GRAMMAGE		Internal	gm/m <sup>2</sup>	16.4	18.2	22.8	27.3	31.9	36.4
YIELD		Internal	m <sup>2</sup> /kg	61.1	54.9	44.0	36.6	31.4	27.5
TREATMENT LEVEL		D-2578	dy/cm	38					
HAZE		D-1003	%	2.0 - 2.5					
GLOSS ( AT 45 ° )		D-2457	%	85 - 90					
HEAT SEAL RANGE @2 bar pressure,1 sec dwell time		Internal	°C	90 - 130					
SEALING STRENGTH @120°C,2 bar pressure,1 sec dwell time		Internal	gm/25mm	> 350					
COEFF OF FRICTION	Dynamic	Internal	-	0.20 - 0.25					
TENSILE STRENGTH AT BREAK	MD*	D-882	kgf/cm <sup>2</sup>	1250					
	TD*			2600					
ELONGATION AT BREAK	MD*	D-882	%	160 - 200					
	TD*			50 - 90					
LINEAR SHRINKAGE (at 120°C/5 mins)	MD*	D-1204	%	< 5.0					
	TD*			< 3.0					

Note: MD – Machine Direction, TD – Transverse Direction

**STORAGE & HANDLING**

SGFBOPPTM does not require special storage conditions. It is recommended to storage below 30°C in order to avoid any deterioration of the film surface properties.It is advisable to use the material on FIFO basis. The film should be kept at anperating environment for 24 hours before processing.SGFBOPPTM is best suitable for use within 6 months from date of dispatch.

**DISCLAIMER**

It is the responsibility of our customers to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects.SGF provides no warranty and accepts no liability for any loss or fitness of the product for any

\*TDS issued on 21-01-2026. All previous version of this grade are invalid.

SGFBOPP FILMS Manufacturing Facilities in India SURYA GLOBAL FLEXIFILIMS Pvt.Ltd, A-119/1,Sector-29 Yamuna Expressway Industrial Development authority Gautam Buddha Nagar, Uttar pradsh-203201,